



Datasheet

EdgeIPS 103/103F

Next-Generation Intelligent Protection System


Safeguarding the Future of Industry: OT Network Security Solutions for Uninterrupted Operation

As we enter the era of Industry 4.0, the integration of Operational Technology (OT) into manufacturing and industrial production is revolutionizing the industry. However, this advancement also brings an increase in sophisticated cyber threats such as ransomware, supply chain attacks, and critical infrastructure targeting. To combat these threats, TXOne has developed a comprehensive suite of OT security solutions, meticulously designed in respond to the complex needs of today's production environments.

Selecting the right security solution is essential to any effective cybersecurity strategy. TXOne offers a diverse range of Edge security solutions, tailored to the specific requirements and operational contexts of each industrial vertical. This ensures that every industry can deploy an optimal solution for its unique environment.

In OT security, protecting operations without disrupting production is critical. TXOne Edge devices leverage AI-powered security intelligence to provide robust and precise protection while ensuring uninterrupted business continuity. These devices integrate seamlessly into existing networks, eliminating the need for downtime. In the rare event of hardware failure, multiple bypass mechanisms help maintain smooth production network traffic and operational continuity.

Comprehensive protection is the cornerstone of effective OT security. EdgeIPS 103/103F combines advanced CPSDR technology with AI-powered security intelligence to strengthen network defenses against unauthorized access, anomalous behavior, and evolving cyber threats. Its enhanced OT visibility provides deeper insight into assets, communications, risks, and threats, enabling security teams to make faster, more informed decisions and respond more effectively to potential security risks.

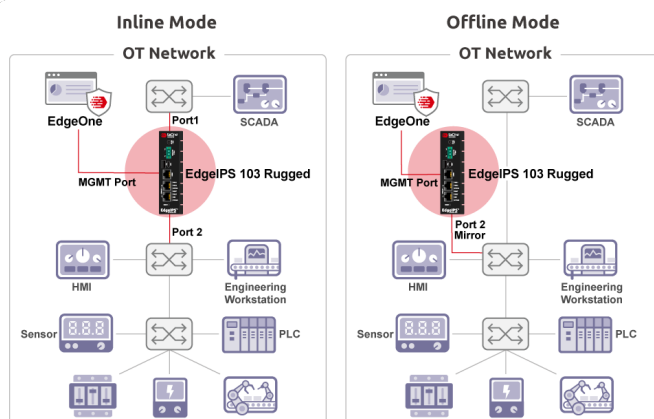

Solution Overview

Building a reliable OT network with ease involves three key elements. First, ensuring a strong feature-environment fit is crucial for seamless hardware adoption. Second, all security features are designed with a primary focus on operational efficiency and continuity. Lastly, OT-specific insights play a pivotal role in enhancing prevention capabilities, addressing gaps often overlooked by general IT security products.

You can find your Edge for all sorts of environments —whether harsh or temperate, centralized or distributed. Our flexible connection types and available port density options ensure that your specific needs are met. The pioneering fail-safe mechanisms and AI-driven deployment strategies reduce the configure-to-service time, ensuring a seamless, uninterrupted end-to-end flow. Combined with our OT-centric, proactive prevention technologies, TXOne makes resilient networking both practical and effective. With rising cybersecurity threats, robust OT security is crucial. TXOne Edge products offer innovative Network-wide Security Situational Awareness, providing real-time threat detection and response across the entire OT environment.

Core Capabilities



Adoption

Fulfilling Technical and Operational Demands with a Swift Onboarding Flow

- ❖ Offers copper and fiber interfaces for varied connectivity.
- ❖ Rugged design for diverse environments.
- ❖ Compact size for space-constrained production sites.
- ❖ Easy on-site installation for rapid deployment.
- ❖ Batch setup supported with Deployment Assistant.



Operation

Activating Protection Painlessly with No Operational Disruption

- ❖ Ensures uninterrupted production by supporting fail-safe mechanisms during hardware failures.
- ❖ Automatically creates and deploys security policies based on AI-curated traffic behaviors.
- ❖ Integrates seamlessly into existing networks without disrupting operations.
- ❖ AI-Powered OT asset identification automatically discovers and profiles OT assets.



Prevention

Crafting a Resilient Network with Operational Insights

- ❖ Identifies and predicts anomalous network behaviors with CPSDR Networking technology.
- ❖ Secures OT network communication and prevents insider threats across ICS protocols.
- ❖ Enhances network segmentation to contain cyber infections and limit lateral movement.
- ❖ Protects unpatched production assets with signature-based virtual patching.
- ❖ Extends IT to OT network protection by importing suspicious objects from third parties.

Key Features



Cyber-Physical System Detection and Response

EdgeIPS 103/103F is built with TXOne's pioneering CPSDR (Cyber-Physical System Detection and Response) technology, designed to identify and predict anomalous network behaviors at an early stage. With the CPSDR, your OT network can proactively stay a step ahead of cyber risks, blocking potential threats before they materialize.



AI-Powered Asset-Centric Auto Rule Learning

EdgeIPS 103/103F uses AI-driven traffic analysis to automatically learn each asset's communication behavior and generate asset-specific allowlist rules. Security teams can quickly review and optimize policies with greater accuracy, reducing manual effort while strengthening OT operational protection and resilience.



Hybrid Approach to OT Protocol Filtering

EdgeIPS 103/103F delivers granular inspection of a wide range of OT protocols—such as Modbus, SECS/GEM, CIP, TSAA, and CODESYS—without requiring a firmware upgrade. This hybrid approach ensures up-to-date protocol filtering capabilities while maintaining uninterrupted operations.



OT-Aware Operational Intelligence

Our core technology for EdgeIPS 103/103F, TXOne One-Pass DPI for Industry (TXODI), gives you the ability to create and edit allowlists, enabling interoperability between key nodes and deep analysis of L2-L7 network traffic.



Signature-Based Virtual Patching

With the cutting-edge research of the Zero Day Initiative (ZDI) vulnerability rewards program, EdgeIPS 103/103F offers you superior control of the patching process for legacy systems to protect them against known threats through virtual patching.



Transparent Network Traffic Control

EdgeIPS 103/103F, specifically designed for levels 1-3, can be deployed in front of mission-critical assets or at the OT network edge. Its transparency and high performance enable it to safeguard network traffic and production assets without disrupting operations.



Flexible Operation Modes

EdgeIPS 103/103F can flexibly switch between 'Monitor' and 'Prevention' modes. Keep in 'Monitor' mode until the detection results are verified by the IT or OT team, then switch to 'Prevention' mode to block malicious traffic.



Holistic CPS Protection Platform Integration

By integrating TXOne EdgeOne with Edge security solutions, you can orchestrate cybersecurity information across all Edge Series devices. This integration goes beyond visibility, offering comprehensive protection and threat detection across all CPS facilities in your organization. It offers actionable recommendations ready for implementation by OT security management teams.



AI-Powered Shadow OT Visibility

EdgeIPS 103/103F leverages AI-Powered Asset Intelligence to autonomously discover unknown OT assets, legacy systems, vulnerabilities, and communication paths across IT/OT networks with zero manual intervention. Eliminate Shadow OT blind spots and gain reliable asset intelligence from day one.



Centralized Management with Convenient, Consolidated Overview

Pattern updates and firmware management can all be centralized on a large scale. For facilities with extensive EdgeIPS 103/103F nodes, EdgeOne facilitates group administration and management, thereby reducing costs and enhancing efficiency on a large scale.

EdgeIPS 103/103F Hardware

EdgeIPS 103



140.1 mm x 109.8 mm x 40.2 mm (5.515 in x 4.322 in x 1.582 in)

Front Panel



Rear Panel



EdgeIPS 103F



195 mm x 110 mm x 34 mm (7.677 in x 4.33 in x 1.338 in)

Front Panel



Rear Panel



EdgeIPS 103/103F Specifications

Feature	EdgeIPS 103	EdgeIPS 103F
Model	IPS-103-BP-R-TX	IPS-103F-BP-R-TX
Threat Prevention Throughput*	850Mbps at least (IMIX) / 1.2Gbps+ (UDP 1518 bytes)	
Latency*	<500 microseconds on average under mixed traffic condition	
Concurrent Connection (TCP)	30,000	
Intrusion Prevention / CPSDR-Networking	Yes / Yes	
Supported ICS Protocol	Modbus, EtherNet IP, CIP, FINS, S7Comm, S7Comm+, SECS, GEM, IEC61850-MMS, IEC-104, TSAA, CODESYS, and more — all supported without requiring a firmware update	
Policy Enforcement Rules	512 device rules / 512 EdgeOne rules	
L2 Policy Enforcement Rules	256 device rules	
ICS Protocol Filter Profiles	64 profiles	
Form Factor	DIN-rail mounting and wall mounting (with optional kit)	
Weight (Standalone Device)	933 g (2.0569 lb)	1.155 kg (2.5463 lb)
Dimensions (W x D x H)	140.1 mm x 109.8 mm x 40.2 mm (5.515 in x 4.322 in x 1.582 in)	195 mm x 110 mm x 34 mm (7.677 in x 4.33 in x 1.338 in)
Network Interface Type	2 x auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	2 x 1Gbps 1000BASE-SX fiber ports (LC connector type – multi-mode)
USB Interface	1 x USB v2.0 Type-A	
Management Interface	Out-of-band interface, 1 x auto-sensing 10/100/1000 Mbps ports (RJ45 connector)	
Hardware Failover	Configurable hardware bypass (copper)	Configurable hardware bypass (fiber)
Management Console Interface	USB Type-C console	
Input Voltage	12/24/48 VDC terminal block / DC-IN 12V	
Input Current	0.483/0.241/0.127 A	
Power Supply	Dual-type input (1 x 2 -pin terminal block, 2 screw supported, V+, V-) / DC-IN 12V standard 12V DC power adapter	
Operating Temperature	-40 to 75 °C (-40 to 167 °F) (wide temperature)	0 to 40 °C (32 to 104 °F)
Ambient Relative Humidity	5 to 95% non-condensing	
Non-Operating / Storage Temperature	-40 to 85 °C (-40 to 185 °F)	
Non-Operating / Storage Relative Humidity	5 to 95% non-condensing	
Vibration	IEC60068-2-6 (without any USB devices attached)	
Mean Time Between Failure (MTBF)	680,000 hours (under 25 °C)	
Certification	CE, FCC (Part 15B Class A), VCCI (Class B) UL (UL 62368-1, UL 60950-1) CISPR 32, EN 55032/35	
Green Product	RoHS, RoHS2, CRoHS, WEEE	
Centralized Management Console	Supports EdgeOne	

* Note: Performance and latency are measured in a laboratory; these values may vary according to test conditions and system configuration.

* Each EdgeIPS is entitled to 2 years of hardware warranty. Upon renewal of the software license, the hardware warranty WILL NOT be extended for the same renewal period, subject to a maximum warranty period of 7 years for the hardware.